


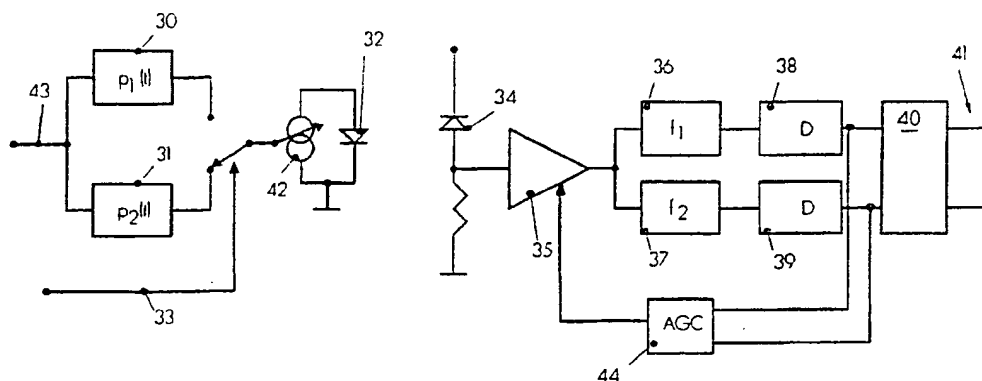

INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(51) International Patent Classification ⁶ : H04B 10/10, 14/02, H04L 25/49, H04J 14/02	A1	(11) International Publication Number: WO 95/23461 (43) International Publication Date: 31 August 1995 (31.08.95)
(21) International Application Number: PCT/EP94/00577 (22) International Filing Date: 28 February 1994 (28.02.94) (71) Applicant (for all designated States except US): INTERNATIONAL BUSINESS MACHINES CORPORATION [US/US]; Old Orchard Road, Armonk, NY 10504 (US). (71) Applicant (for PL only): IBM DEUTSCHLAND INFORMATIONSSYSTEME GMBH [DE/DE]; Pascalstrasse 100, D-70569 Stuttgart (DE). (72) Inventor; and (75) Inventor/Applicant (for US only): HIRT, Walter [CH/CH]; Hinderweidstrasse 29, CH-8907 Wettswil (CH). (74) Agent: BARTH, Carl, Otto; IBM Research Laboratory, Intellectual Property Dept., Säumerstrasse 4, CH-8803 Rüschlikon (CH).	(81) Designated States: JP, PL, US, European patent (AT, BE, CH, DE, DK, ES, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE). Published <i>With international search report.</i>	

(54) Title: METHOD AND APPARATUS FOR OPTICAL WIRELESS COMMUNICATION**(57) Abstract**

The wireless communication system, comprising a transmitter and a receiver, operates according to the present PPM-FSK modulation format with two subcarrier frequencies f_1 and f_2 . The PPM encoded data on the main data channel (43) are fed to two pulse shaping circuits (30, 31) for additional frequency modulation with said frequencies. The resulting hybrid PPM-FSK signal is used to drive a light source (32). The receiver comprises a photodiode (34) coupled to an amplifier (35). The electrical signal obtained at the output of the amplifier (35) is fed to bandpass filters (36, 37) and envelope detectors (38, 39). The outputs of the envelope detectors are fed to a device (40) designed for pulse restoration and frequency decision. In a first operation, device (40) uses the output signals of the two envelope detectors (38, 39) to derive from them the estimated PPM encoded data signal. It then uses this signal to produce estimated restored pulses and outputs them. Then device (40) uses the output signals of the two envelope detectors to derive the estimated frequency information which carries auxiliary data information. It then uses this signal to produce estimated restored auxiliary data bits.

FOR THE PURPOSES OF INFORMATION ONLY

Codes used to identify States party to the PCT on the front pages of pamphlets publishing international applications under the PCT.

AT	Austria	GB	United Kingdom	MR	Mauritania
AU	Australia	GE	Georgia	MW	Malawi
BB	Barbados	GN	Guinea	NE	Niger
BE	Belgium	GR	Greece	NL	Netherlands
BF	Burkina Faso	HU	Hungary	NO	Norway
BG	Bulgaria	IE	Ireland	NZ	New Zealand
BJ	Benin	IT	Italy	PL	Poland
BR	Brazil	JP	Japan	PT	Portugal
BY	Belarus	KE	Kenya	RO	Romania
CA	Canada	KG	Kyrgyzstan	RU	Russian Federation
CF	Central African Republic	KP	Democratic People's Republic of Korea	SD	Sudan
CG	Congo	KR	Republic of Korea	SE	Sweden
CH	Switzerland	KZ	Kazakhstan	SI	Slovenia
CI	Côte d'Ivoire	LI	Liechtenstein	SK	Slovakia
CM	Cameroon	LK	Sri Lanka	SN	Senegal
CN	China	LU	Luxembourg	TD	Chad
CS	Czechoslovakia	LV	Latvia	TG	Togo
CZ	Czech Republic	MC	Monaco	TJ	Tajikistan
DE	Germany	MD	Republic of Moldova	TT	Trinidad and Tobago
DK	Denmark	MG	Madagascar	UA	Ukraine
ES	Spain	ML	Mali	US	United States of America
FI	Finland	MN	Mongolia	UZ	Uzbekistan
FR	France			VN	Viet Nam
GA	Gabon				

DESCRIPTION

Method and Apparatus for Optical Wireless Communication

TECHNICAL FIELD

The present invention concerns a method and apparatus for optical communication based on pulse-position-modulation (PPM).

BACKGROUND OF THE INVENTION

With the rapidly increasing number of workstations and personal computers (e.g. desktop or handheld ones) in all areas of business, administration, fabrication etc., there is also an increasing demand for flexible and simple interconnection of these systems. There is a similar need as far as the hook-up and interconnection of peripheral devices, such as keyboards, computer mice, printers, plotters, scanners, displays etc., is concerned. The use of electrical wire networks and cables becomes a problem in particular with increasing density of systems and peripheral devices and in the many cases where the location of systems, or the configuration of subsystems, must be changed frequently. It is therefore desirable to use wireless communication systems for interconnecting such devices and systems to eliminate the requirement of electrical cable networks.

In particular the use of infrared signals for exchanging information between systems and remote devices received increased interest during recent years. The advantage of such wireless infrared communications systems is the elimination of most of the conventional wiring. With respect to radio frequency (RF) wireless transmission, optical infrared (IR) wireless transmission has the advantages that no communication regulations apply and no PTT or FCC license is required. Additionally, no disturbance by

1 electro-magnetic interference and no interference from other RF channels
can occur, and the radiation is confined to a room so that better data
security is guaranteed than with RF systems. There is thus no interference
with similar systems operating next door and a higher degree of data
5 security is afforded than radio-frequency transmission can offer. In contrast
to radio-frequency antennae, the dimensions of light emitting diodes (LED)
and photodiodes are usually smaller, which is of particular interest when
designing portable computers.

10 Given an optical channel where the optical transmitter power, the ambient
light conditions, and the photodiode area are all fixed quantities, power
efficiency becomes the main criterion in choosing a modulation scheme in
order to maximize the distance over which reliable transmission can be
maintained. Judged by the power efficiency and ignoring bandwidth
15 efficiency, L-slot pulse-position-modulation (L-PPM) would be the preferred
modulation scheme for optical communication. Being a baseband
modulation scheme, L-PPM is not suited for those applications where
multiple collocated optical networks are required, since only a single L-PPM
system can operate in a given location without coordination between
20 collocated networks. As already mentioned, there is an increasing demand
for optical wireless local area networks (WLANs) and peer-to-peer networks
which can coexist independently within the same location. PPM is not suited
for these kind of collocated networks.

25 There is no approach known which satisfies the requirements for high power
efficiency and reliability under adverse conditions as well as the demand for
collocated independent disturbance- and interference-free optical networks.
While L-PPM might be the preferred method with respect to power
efficiency, it cannot provide for

30

- 1 • collocated multiple channels.
- duplex transmission, and
- 5 • flexible use and adaptation of bandwidth and data throughput.

In addition, optical PPM communications systems suffer from interference caused by fluorescent light sources at frequencies up to 500 kHz.

- 10 Frequency Shift Keying (FSK), on the other hand, is a carrier (bandpass) modulation scheme which is well suited for multiple channel operation but is poor in terms of power efficiency when compared to L-PPM. IR communications systems with bandwidths of up to 30 MHz can be achieved with todays component technology and further advances in terms of
- 15 available bandwidth are expected in the future. Present baseband PPM systems do not fully exploit this available frequency spectrum.

- It is another disadvantage of known optical communication systems that they are susceptible to interference caused by residual ambient light.
- 20 Especially wireless IR data communication systems operating in a daylight environment are exposed to a high level of shot noise caused by light falling onto the receiver photodiode. Light from an incandescent desk lamp falling on the receiver diode is a source of shot noise having a detrimental influence on the IR communication, too. Due to residual ambient light, or
- 25 due to the degree of optical path obstructions, the maximum transmission range between any two stations of an optical wireless communication system is variable. As a result, the network connectivity is unreliable except for very short distances.

- 30 Furthermore, the output power of a light source used as transmitter, e.g. a conventional LED or a laser diode, is limited such that the maximum transmission range is limited, too. These diodes can usually not be operated constantly, since the operation at high power has a detrimental

1 influence on their lifetime. When increasing the photodiode area of the
receiver, the transmission range may be further increased. Such a receiver
is usually integrated in a portable computer or a peripheral device and the
size of the photodiode area is limited due to design considerations and cost
5 restrictions.

SUMMARY OF THE INVENTION

10 It is an object of the present invention to provide a method and apparatus
for improved and more flexible optical communication.

It is another object of the present invention to provide a method and
apparatus for improved infrared (IR) communication making efficient use of
15 the characteristics of IR light emitting diodes and IR emitting lasers.

It is an object of the present invention to provide a method and apparatus
for optical, multiple collocated networks and duplex transmission networks.

20 The above objects have been accomplished by provision of a new
modulation scheme for optical wireless communication. This new
modulation scheme is based on an L-slot pulse-position-modulation (L-PPM)
scheme and allows the transmission of additional or redundant information
as bandpass components as claimed in independent claims 1, 6, 7 and 8.

25

30

DESCRIPTION OF THE DRAWINGS
AND NOTATIONS USED

The invention is described in detail below with reference to the following drawings:

FIG. 1A shows a wireless optical link between a computer and a keyboard.

FIG. 1B shows a wireless optical network, sometimes called LAN on a table, interconnecting different computers and terminals as well as peripheral devices (e.g. a printer).

FIG. 1C shows a wireless optical network with ring topology, called Intra Office LAN, interconnecting different computers and a mainframe.

FIG. 1D shows part of a wireless optical network with a repeater situated at the ceiling, called Intra Office LAN with repeater, usually employed in open area offices, conference rooms, or factory halls.

FIG. 2 illustrates a frame signal set for a L-slot hybrid PPM-FSK system ($L = 16$), in accordance with the present invention.

FIG. 3A illustrates an example of a rectangular shaped pulse according to equation (1a) for a L-slot hybrid PPM-FSK system ($n = 4$).

FIG. 3B illustrates an example of a rectangular shaped pulse according to equation (1b) for a L-slot hybrid PPM-FSK system ($n = 4$).

1 **FIG. 4** illustrates an example of a sinusoidal shaped pulse for a L-slot hybrid PPM-FSK system.

5 **FIG. 5** illustrates an estimated example of a rectangular shaped pulse for a L-slot hybrid PPM-FSK system (see also Figure 3A):
a) pulse time response,
b) pulse frequency response,
c) frequency response of filtered (bandpass) pulse, and
d) time response of filtered (bandpass) pulse.

10 **FIG. 6** illustrates an estimated example of a sinusoidal shaped pulse for a L-slot hybrid PPM-FSK system (see also Figure 4):
a) pulse time response,
b) pulse frequency response,
15 c) frequency response of filtered (bandpass) pulse, and
d) time response of filtered (bandpass) pulse.

20 **FIG. 7** illustrates an estimated example of the effect on a bandpass signal (bottom) in the presence of multipath distortion.

FIG. 8 illustrates an estimated example of the effect on a baseband signal (bottom) in the presence of multipath distortion.

25 **FIG. 9** shows a first basic implementation of the present hybrid PPM-FSK system with two subcarrier frequencies.

30 **FIG. 10** shows an opto-electronic receiver in accordance with the present invention in order to illustrate the modularity and compatibility of the present hybrid PPM-FSK scheme with conventional PPM systems.

GENERAL DESCRIPTION

An optical wireless communications system, as herein addressed, comprises a first unit serving as transmitter and a second unit as receiver; the transmitter comprising a light source and the receiver comprising a photodiode. The word unit is hereinafter used as a synonym for all kinds of computers, terminals, repeaters, peripheral devices, etc. which might communicate with each other, either unidirectional or bidirectional.

Note that, when herein referring to optical signal source, all different kinds of diodes, including the conventional LEDs as well as laser diodes, are meant.

In the following, some typical configurations of wireless communications systems are presented. A simple wireless optical link between a computer and a keyboard is illustrated in Figure 1A. A wireless optical network, sometimes called LAN on a Table, is shown in Figure 1B. As illustrated in this Figure, three different units are linked to a fourth one. In the present example, two computers 23, 25 and a terminal 24 are linked to a printer 22.

In Figure 1C, a wireless optical network with ring topology, called Intra Office LAN, is shown. This network interconnects three computers 27 with a mainframe machine 26.

Another exemplary optical network configuration is shown in Figure 1D. A first unit, e.g. a repeater 28, is situated at the ceiling in order to be able to communicate with remote units. In the present example the remote units are computers 29. Such a configuration is usually called Intra Office LAN with repeater, and might be employed in open area offices, conference rooms, and factory halls.

It has been determined by experiment that the bit error probability of optical communications systems strongly depend on the noise generated by

1 different ambient light environments. Conventional wireless optical systems have proved not to operate reliable under realistic office conditions.

In the following sections, the properties of the present hybrid PPM-FSK
5 (pulse-position-modulation frequency-shift-keying) scheme, a novel modulation format, will be addressed.

Frame Signal Set:

10 Figure 2 shows the frame signal set for an L-slot hybrid PPM-FSK system with, for example, 16 slots ($L = 16$). As in a conventional L-PPM baseband system, there are L possible pulse positions, such that the pulse in each frame (sometimes also referred to as symbol) carries $\log_2(L)$ bits of information. In contrast to ordinary L-PPM systems where the pulses
15 transmitted are rectangular baseband pulses, the present hybrid PPM-FSK systems use a pulse, possibly non-rectangular for spectral shaping, which is also frequency modulated (indicated by the shaded pulses in Figure 2 - see also Figures 3A and 3B). Both baseband L-PPM and hybrid PPM-FSK use intensities such that \bar{P} , the allowed average intensity of the light source of
20 the transmitter, is usually not exceeded. Under certain conditions exceptions may be tolerable.

Rectangular Shaped Pulse:

25 Figures 3A and 3B show exemplary rectangular shaped pulses to be used in the present hybrid PPM-FSK system. Their forms reflect the fact that the optical intensity of the optical transmitter, e.g. an IR transmitter, can only have positive values. The proposed hybrid PPM-FSK makes use of the allowed average intensity, \bar{P} , which can be delivered by the transmitter. I.e.
30 the average intensity of the frequency modulated pulse in Figure 3A equals \bar{P} , the average intensity of the corresponding rectangular baseband pulse (dashed lines in Figures 3A and 3B). We ignore here the fact that the peak intensity of the transmitter may also be limited in practice; also, under

certain conditions, for example as in Figure 3B, \bar{P} may be insignificantly exceeded. Mathematically, the rectangular shaped pulse for L-slot hybrid PPM-FSK can take the form

$$p(t) = \begin{cases} 1 - \cos\left(2\pi \frac{nL}{T} t\right), & 0 \leq t < T/L \\ 0 & \text{otherwise,} \end{cases} \quad (1a)$$

or

$$p(t) = \begin{cases} 1 + \sin\left(2\pi \frac{(n+0.5)L}{T} t\right), & 0 \leq t < T/L \\ 0 & \text{otherwise,} \end{cases} \quad (1b)$$

where T is the frame duration, L is the number of slots per frame and $n \geq 1$ is an integer (in Figures 3A and 3B $n = 4$ is used). The resulting subcarrier frequencies are thus nL/T and $(n+0.5)L/T$, respectively. The frame signal set, shown in Figure 2, can now be defined on the interval $t \in [0, T)$ as

$$s_i(t) = \begin{cases} p[t - (i-1)T/L], & (i-1)(T/L) \leq t < i(T/L) \\ 0 & \text{otherwise,} \end{cases} \quad (2)$$

with $i = 1, 2, 3, \dots, L$. Independent frame signal sets of the form (2) can be obtained by properly choosing different values for n in equations (1a) or (1b) for each set, yielding different subcarrier frequencies. Note that equations (1) imply 100% modulation of the rectangular pulse with the subcarrier. In practice, less than 100% modulation may be used.

1 Arbitrary Shaped Pulse:

Pulse shaping can be introduced to control the frequency spectrum of the pulse. Let $g(t)$ be a positive function defined on the interval $[0, T/L)$ such
 5 that

$$\frac{1}{T} \int_0^{T/L} g(t) dt = \bar{P}, \quad g(t) \geq 0. \quad (3)$$

Equation (3) assures that hybrid PPM-FSK signals essentially satisfy the transmitter's average intensity constraint. The arbitrary shaped pulse used
 in the present hybrid PPM-FSK systems is then given by

$$p(t) = \begin{cases} g(t) \left[1 - \cos\left(2\pi \frac{nL}{T} t\right) \right], & 0 \leq t < T/L \\ 0, & \text{otherwise,} \end{cases} \quad (4a)$$

or

$$p(t) = \begin{cases} g(t) \left[1 + \sin\left(2\pi \frac{(n+0.5)L}{T} t\right) \right], & 0 \leq t < T/L \\ 0, & \text{otherwise,} \end{cases} \quad (4b)$$

For the rectangular pulse illustrated in Figures 3A and 3B the shaping
 function $g(t) = L\bar{P}$, $0 \leq t < T/L$. For the example shown in Figure 4,
 equation (4a) has been used with $g(t) = (\pi/2) \sin[\pi(L/T)t]$, $0 \leq t < T/L$.

30 Bandpass Signal:

Figures 5 and 6 show examples for the rectangular pulse and the sinusoidal
 shaped pulse, respectively, using equation (4a) with $n = 4$. The time
 responses (at the bottom of these Figures) for the filtered pulses (bandpass

- 1 signals) indicate that the shaping function $g(t)$ can be recovered from the envelope of the bandpass signal.

Expanded Frame Signal Set:

5

The frame signal set for hybrid PPM-FSK defined in (2) for a specific subcarrier frequency transmits $\log_2(L)$ bits per frame, as is the case for baseband L-PPM. One way of increasing the dimensionality of the frame signal set, but without changing L , is to assign different subcarrier frequencies to the same frame signal set, rather than assigning different subcarriers to independent signal sets. For example, with two subcarrier frequencies assigned to the same set, $\log_2(2L)$ bits per frame can be transmitted. In general, with M subcarrier frequencies assigned to the same set, $\log_2(ML)$ bits per frame can be transmitted. We can thus define a new expanded frame signal set, defined on the interval $t \in [0, T)$, as

$$s_i^{[m]}(t) = \begin{cases} p_m[t - (i-1)T/L], & (i-1)(T/L) \leq t < i(T/L) \\ 0, & \text{otherwise,} \end{cases} \quad (5)$$

20

with $i = 1, 2, \dots, L$; $m = 1, 2, \dots, M$, where the pulse for the m -th subcarrier is defined as

$$p_m(t) = \begin{cases} g(t) \left[1 - \cos\left(2\pi \frac{n_m L}{T} t\right) \right], & 0 \leq t < T/L \\ 0, & \text{otherwise,} \end{cases} \quad (6a)$$

or

$$p_m(t) = \begin{cases} g(t) \left[1 + \sin\left(2\pi \frac{(n_m + 0.5)L}{T} t\right) \right], & 0 \leq t < T/L \\ 0, & \text{otherwise,} \end{cases} \quad (6b)$$

1 with integers $n_m = n_1, n_2, \dots, n_M$. The subcarrier pulse signals are orthogonal
 to each other (zero cross-correlation) since their separation in frequency is
 a multiple of L/T . This property allows for both coherent and noncoherent
 detection of the bandpass components of the PPM-FSK pulses, although the
 5 latter method has proved to be more practical. Tables 1, 2, and 3 illustrate
 the relevant parameters which characterize expanded frame signal sets.

The following definitions apply:

10	L	number of slots per frame
	M	number of subcarriers in frame signal set
	$\log_2(ML)$	number of bits transmitted per frame
	T	frame duration [s]
15	$R_b = \log_2(ML)/T$	aggregate bit rate [bps]
	$\tau = T/L = \frac{\log_2(ML)}{LR_b}$	pulse (slot) width [s]

20	Table 1: Example for $R_b = 1\text{Mbps}$ and $M = 1$			
	L	$\log_2(ML)$	$\tau[\text{ns}]$	T [ns]
	2	1	500	1000
25	4	2	500	2000
	8	3	375	3000
	16	4	250	4000
30	32	5	156.25	5000

1

Table 2: Example for $R_b = 1\text{Mbps}$ and $M = 2$			
L	$\log_2(ML)$	$\tau[\text{ns}]$	T [ns]
2	2	1000	2000
4	3	750	3000
8	4	500	4000
16	5	312.5	5000
32	6	187.5	6000

5

10

15

Alternatively, the pulse (slot) width τ can be kept constant as M is changed, resulting in an increased aggregate data rate. The relative increase can be expressed as

20

$$\frac{R_b(M)}{R_b(M=1)} = 1 + \frac{\log_2(M)}{\log_2(L)} \quad (7)$$

25

For $M = 2$, for example, the increase in aggregate data rate is $100/\log_2(L)$ in percent (see table 3). Note that we ignore guard bands between frames or packets of frames when computing the aggregate data rate.

30

1

5

10

15

20

25

30

Table 3: Example of increase in data rate for $M = 2$

L	$100 / \log_2(L) [\%]$
2	100
4	50
8	33
16	25
32	20

Effect of Multipath Propagation:

Multipath propagation affects hybrid PPM-FSK signals such that the signal components from the delayed paths constructively or destructively influence the composite signal, depending on the relation between the delays and the subcarrier frequency. Conventional FSK is affected similarly. The simple two-path model

$$r(t) = s(t) + \alpha s(t - t_D) \quad (8)$$

is considered, where t_D is the delay time and α is an attenuation factor. With equation (1a) for the pulse waveform, the effect of destructive multipath distortion is illustrated in Figures 7 and 8 (where $n = 4$, $\alpha = 0.5$, and $t_D = \tau/8$) the bandpass (filtered) waveform is reduced in amplitude by a factor of two while the amplitude of the baseband pulse is increased by about 50%. Constructive multipath distortion of the bandpass waveform can be similarly obtained with an appropriate t_D . The case illustrated in Figures 7 and 8 is rather extreme to show the effect.

1 The effect of multipath distortion in a practical situation depends critically on
the chosen data rate which in turn determines the slot width T/L used.
Based on estimates of the power penalty incurred by multipath distortion for
5 an on-off keyed (OOK) system, it can be expected that similar results hold
for the present hybrid PPM-FSK signals.

Compatibility with (existing) Baseband PPM Systems:

10 From equations (4a) and (4b) follows clearly that the frequency spectrum of
the intensity pulse $p(t)$ has a baseband component as well as a bandpass
component. For equation (4a) we have the Fourier transform pair

$$15 \quad p(t) \leftrightarrow P(f) = G(f) - \frac{1}{2} \left[G\left(f + \frac{nL}{T}\right) + G\left(f - \frac{nL}{T}\right) \right]. \quad (9)$$

With appropriate choice of n , this implies that IR intensity signals
transmitted from a hybrid PPM-FSK source can be received from both
20 bandpass receivers as well as baseband receivers. Hence, the present
hybrid PPM-FSK systems can be made downward compatible with existing
baseband PPM schemes. Downward compatibility can be used with only a
single network operating in a given location since the baseband spectra of
different uncoordinated subcarrier pulses interfere with each other.

25 Potential for Diversity Gain:

The fact that equation (9) holds for hybrid PPM-FSK pulses may be exploited
by combining signals simultaneously recovered from a bandpass receiver
(envelope) and a baseband receiver. Such a scheme may improve system
30 performance, in particular in the presence of multipath distortion. Again,
this scheme can only be applied when a single network is being used in a
given location since the baseband spectra of different, uncoordinated
subcarrier pulses interfere with each other.

1 In the following, some applications of the present hybrid PPM-FSK scheme
in optical wireless systems are addressed. Hybrid PPM-FSK signals can be
used in different ways in optical wireless systems. The added
dimensionality in the frequency domain can be exploited to obtain different
5 modes of operation:

1. Independent Collocated Networks:

Different frame signal sets can be assigned to different subcarrier
frequencies to obtain independent multichannel operation for collocated
10 networks. The receivers in a given network use the same bandpass
filters to suppress interference from the collocated networks operating
with different subcarriers. In addition, any interference caused by
fluorescent light sources is suppressed in all networks, provided that
the smallest n in equations (1a) and (1b) is chosen such that the
15 corresponding bandpass filter passes no frequency components below
the frequency limit to which interference from fluorescent lighting can
be expected. This frequency limit is typically 500 kHz.

2. Coordinated Collocated Networks:

20 If needed, collocated networks operating with different subcarrier
frequencies could coordinate their activities by observing the baseband
spectrum since the transmitters of all networks are transmitting the
baseband pulse besides the desired bandpass signal. Any active
transmitter within the different networks can thus be sensed by all
25 networks, independent of the subcarrier frequency used by a particular
network. The "carrier sense" detector (actually sensing the baseband
spectrum) can be identical for all receivers used in the different
networks.

30 3. Single Network with Auxiliary Channel:

Assume a situation where only a single network operates in the same
location. The added frequency dimension offered by the present hybrid
PPM-FSK signals could then be used to obtain a higher aggregate data

1 rate as explained above. Alternatively, the frequency dimension could
be used as an auxiliary parallel channel to simultaneously transmit
independent data, or redundant (e.g. parity) data. The redundant data
could for example be used for error correction or erasure. Two
5 scenarios are possible:

- The main channel is formed by either the baseband L-PPM scheme
or the basic underlying L-PPM scheme (ignoring information on
subcarrier frequencies), which transmits at the bit rate
10 $R_{\text{main}} = \lceil \log_2(L) \rceil / T$, and the auxiliary channel is formed by $M \geq 2$
subcarriers, which transmit at the bit rate $R_{\text{aux}} = \lceil \log_2(M) \rceil / T$.
- The main channel is formed by the baseband L-PPM scheme,
which transmits at the bit rate $R_{\text{main}} = \lceil \log_2(L) \rceil / T$. Only one
15 subcarrier ($M = 1$) is used, i.e. data on the auxiliary channel are
conveyed by on-off keying (OOK) of the subcarrier at the rate $1/T$.

If used independently, the main and auxiliary channels can transmit
independent data to two different destinations. If the auxiliary channel
20 transmits redundant data some error correction/erasure scheme can be
implemented. The auxiliary channel may also be useful during setup of
connections. The auxiliary channel might also be used for
retransmission of data in order to reduce the error probability under
adverse conditions.

25

4. Multiple Collocated Networks with Auxiliary Channels:

Assume a situation where multiple networks operate in the same
location, i.e. the baseband spectrum of the channel cannot be used.
The added frequency dimension offered by hybrid PPM-FSK signals
30 could then be used to obtain a higher aggregate data rate by using a
distinct set of M subcarriers for each network, as explained above.
Alternatively, the frequency dimension could be used as an auxiliary
parallel channel to simultaneously transmit independent data or

1 redundant (e.g. parity) data for error correction or erasure. In this
application, the main channel is formed by the basic underlying L-PPM
scheme (ignoring information on subcarrier frequencies), which
transmits at the bit rate $R_{\text{main}} = \lceil \log_2(L) \rceil / T$, and the auxiliary channel is
5 formed by $M \geq 2$ subcarriers, which transmit at the bit rate
 $R_{\text{aux}} = \lceil \log_2(M) \rceil / T$. If used independently, the two channels in any
particular network can transmit independent data to two different
destinations. If the auxiliary channel transmits redundant data some
error correction/erasure scheme might be implemented. The auxiliary
10 channel may also be useful during setup of connections.

5. Duplex Operation:

The first scenario described in 3. and the scenario described in 4. can
be modified to allow duplex operation, i.e. simultaneous transmission
15 and reception between two units in a network (e.g. between a
basestation and a mobile unit). This can be accomplished by assigning
independent sets of subcarriers for transmission and reception to the
terminals involved and by appropriate design of the transmitters and
receivers. Duplex operation may also be useful during setup of
20 connections, e.g. for speed negotiations.

A conventional PPM communications system for wireless optical data
transmission comprises a transmitter with a PPM encoder for transformation
of serial user data into pulse position modulated signals (usually of
25 rectangular shape) and a light source. The receiver of such a PPM system
usually comprises means for pulse restoration and a pulse position decoder
re-generating said serial user data. The transmitter of the present hybrid
PPM-FSK system further comprises means for frequency modulation which
modulate a subcarrier frequency f_c with the pulse-position-modulated
30 signals provided by the PPM transmitter part, and means for modulating the
intensity of said light source in order to transmit additional or redundant
information as bandpass components. The receiver of a hybrid PPM-FSK

1 system might further comprise means for bandpass filtering and means for the detection of said information transmitted as bandpass components.

5 An extension of the pulse-position-modulated signals to a signal set with a second subcarrier frequency provides for an additional channel for the transmission of information as second bandpass components. The added dimensionality allows duplex communication.

Exemplary implementations of the present invention are described in the following. On the left-hand side of Figure 9, an IR transmitter is shown which operates, according to the hybrid PPM-FSK modulation format proposed, with two subcarrier frequencies f_1 and f_2 . The PPM encoded data on the main data channel 43 are fed to two pulse shaping circuits 30 and 31 for additional frequency modulation with frequencies f_1 and f_2 , respectively, according to Equations (1a) or (1b). The binary auxiliary data channel 33 is used to select one of the FSK modulator outputs, for example, an auxiliary data "0" selects the output of the upper modulator 30 and an auxiliary data "1" selects the lower output of the modulator 31. The resulting hybrid PPM-FSK signal is then used to control a current source 42 which in turn modulates the intensity of the IR light source 32 (LED or laser diode).

A receiver frontend for hybrid PPM-FSK IR intensity signals can be implemented using basic components developed separately in the past for PPM or FSK modulated signals. A photodiode 34 translates the received IR light into an electrical current which results in a corresponding voltage at the output of the amplifier 35. The gain of this amplifier might be controlled by a corresponding gain control circuitry (AGC) 44 which operates such that it ensures constant output voltage over a suitable range of received levels of IR light. In this example, the gain control circuitry 44 derives its output signal controlling amplifier 35 from measuring the signal amplitudes at the outputs of the envelope detectors 38 and 39. Other schemes are possible as well. Other arrangements of photodiode 34 and amplifier 35 are also conceivable. The electrical signal obtained at the output of the amplifier 35

1 is fed to bandpass filters 36 and 37, and respective envelope detectors 38 and 39.

5 The outputs of the envelope detectors 38 and 39 are fed to a device 40 which is specifically designed for pulse restoration and frequency decision based on hybrid PPM-FSK signals. In a first operation, device 40 uses the output signals of the two envelope detectors 38 and 39 to derive from them the estimated PPM encoded data signal. It then uses this signal to produce estimated restored pulses and output them on one of the output terminals 10 41. In a second operation, device 40 uses the output signals of the two envelope detectors 38, 39 to derive from them the estimated frequency information which carries the auxiliary data information. It then uses this signal to produce estimated restored auxiliary data bits and outputs them on one of the output terminals 41.

15

The estimated pulse positions (according to the PPM part of the invention) and estimated frequency information (according to the FSK part of the invention) are made available at the output of said device 40. The outputs of device 40 may be used for direct decoding of the transmitted main data 20 (pulse position) and auxiliary data (frequency information).

In Figure 10, an opto-electronic receiver is shown, which is used to illustrate the modularity and compatibility of the present invention with conventional PPM systems. As schematically shown in this Figure, the receiver 25 comprises a conventional opto-electronic receiver 60 (frontend) followed by an optional FSK unit 61, and a PPM unit 62. The output of such a receiver might be coupled via an interface logic 63 to a personal computer or a network for example. Additionally, different implementations of a device for automatic gain control 64 (AGC) are indicated. Different configurations of 30 the above units are conceivable and a receiver might be easily adapted to the respective transmission scheme. Even a conventional PPM receiver, i.e. a receiver only comprising units 60 and 62, is able to receive and detect the baseband components sent by a hybrid PPM-FSK transmitter.

1 The above described systems (see Figures 9 and 10) might comprise means
for adjusting the data throughput for the transmission of data from the
transmitter to the receiver. The data throughput can either be adjusted
automatically or selected and adjusted by the user. For means operating
5 automatically, it is necessary to watch and determine the ambient light
conditions. This can be done by direct or indirect means. For example a
second photodiode can be employed at the receiver which serves as
reference source for determining the actual environment conditions at the
receiver. Ambient light conditions can also be estimated from error rate
10 measurements in the receiver itself.

The means for controlling the data throughput and adjusting the data rate
can be implemented such that, when adverse ambient light conditions are
detected, the transmission rate is reduced on individual channels and the
15 information is transmitted via parallel channels provided by the FPM-FSK
scheme. This allows to keep the data throughput almost constant even
under adverse conditions. In case of transmission with reduced data rate,
the effective width of the bandpass filter at the receiver side has to be
reduced automatically.

20 By means of a suitable communications protocol, the data throughput for
communication between the transmitter and the receiver might be
negotiated either when installing a communications system in accordance
with the present invention, or each time an optical communication link is
25 setup, or each time a data packet is sent.

When employing the present invention in an optical network with repeater,
which retransmits correctly received data packets, as illustrated in
Figure 1D, the overall network throughput and area coverage can be
30 increased. Alternatively, one or several participating units (stations) may be
configured to retransmit packets not addressed to themselves. The repeater
concept is also suited to increase the overall network range which is
important in open area offices, for example.

1

One or several participating units (stations) may be configured to automatically switch to data transmission according to the hybrid PPM-FSK scheme under adverse conditions.

5

It is to be noted that other types of frequency modulation are possible. Instead of using a constant frequency f_1 , one could for example linearly increase the frequency over the pulse width (known as chirp-modulation).

10

15

20

25

30

CLAIMS

1. Method for optical wireless communication between a transmitter and a receiver, said transmitter
 - transforming data to be transmitted into pulse-position-modulated (PPM) signals,
 - generating driver signals by modulating a subcarrier signal of constant or variable frequency f_1 with said PPM signals, and
 - modulating a light source (32) with said driver signals to transmit data as baseband and/or bandpass components,and said receiver
 - bandpass filtering the received signals,
 - detecting said data transmitted as bandpass components,
 - detecting said data transmitted as baseband components, and
 - decoding said PPM signals.
2. The method of claim 1, said transmitter
 - transmitting data as further bandpass components by modulating a further subcarrier signal of constant or variable frequency f_2 with said PPM signals,and said receiver
 - bandpass filtering the received signals, and
 - detecting said data transmitted as further bandpass components.
3. The method of claims 1 or 2, wherein the bandpass components are used for duplex transmission of data.
4. The method of claim 1, wherein said PPM means (62) and FSK means (61) detect said baseband components and bandpass components simultaneously, the detected components being used to reduce the error probability of the transmitted data.

- 1 5. The method of claims 1 or 2, wherein said bandpass components are
used for protocol negotiations at connection setup.
- 5 6. Transmitter for use in an optical wireless pulse-position-modulation
(PPM) communication system, comprising
- PPM encoder means for the transformation of data into PPM
signals,
 - frequency modulation means (30) generating driver signals by
modulating a subcarrier signal of constant or variable frequency f_1
10 with said PPM signals,
 - a light source (32), and
 - means (42) for modulating said light source (32) with said driver
signals to transmit data as baseband and/or bandpass
components.
- 15
7. Receiver for use in an optical wireless pulse-position-modulation (PPM)
communication system comprising an opto-electronic converter (60),
frequency-shift-keying (FSK) means (61) with
- means for bandpass filtering (36), and
 - 20 • means (38, 40) for detection of said data transmitted as bandpass
components:
- and PPM means (62) with
- pulse position decoding means for detection of said data
transmitted as baseband components.
- 25
8. Optical wireless pulse-position-modulation (PPM) communication system
comprising a transmitter with
- PPM encoder means for the transformation of data into PPM
signals,
 - 30 • frequency modulation means (30) generating driver signals by
modulating a subcarrier signal of constant or variable frequency f_1
with said PPM signals,
 - a light source (32), and

- 1 • means (42) for modulating said light source (32) with said driver signals to transmit data as baseband and/or bandpass components,
- and comprising a receiver having an opto-electronic converter (60),
- 5 frequency-shift-keying (FSK) means (61) with
- means for bandpass filtering (36), and
- means (38, 40) for detection of said data transmitted as bandpass components,
- and PPM means (62) with
- 10 • pulse position decoding means for detection of said data transmitted as baseband components.
9. The transmitter of claim 6 or the transmitter of the PPM communication system of claim 8, further comprising means (31) for extending said
- 15 PPM signals to a signal set with a further subcarrier signal of constant or variable frequency f_2 , thus providing for an additional channel for the transmission of data as further bandpass components.
10. The receiver of claim 7 or the receiver of the PPM communication system of claim 8, comprising
- 20 • further means for bandpass filtering (37), and
- further means (39, 40) for detection of data transmitted as further bandpass components.
- 25 11. The PPM communication system of claim 8, being equipped for duplex communication by transmission of data as first, second or higher bandpass components.
- 30 12. The PPM communication system of claim 8, comprising means for increasing the dimensionality of the frame signal set used for the pulse-position-modulation, by assigning different subcarrier frequencies to said frame signal set.

- 1 13. The PPM communication system of claim 8, wherein different frame
signal sets are assigned to different subcarrier frequencies to obtain
independent multichannel operation for collocated networks.
- 5 14. The PPM communication system of claim 13, wherein all receivers of a
first network use the same bandpass filters to suppress interference
from said collocated networks operating with different subcarriers
frequencies.
- 10 15. The PPM communication system of claim 8, wherein said FSK means
(61) further comprise means for coherent and/or noncoherent, including
hybrid, detection of said bandpass components.
- 15 16. The PPM communication system of claim 8, wherein signals
simultaneously detected by said PPM means (62) and said FSK means
(61) are used to reduce the error probability of the transmission caused
by multipath distortion and/or noise and/or ambient light.
- 20 17. The PPM communication system of claim 8, wherein different frame
signal sets are assigned to different subcarrier frequencies to obtain
multichannel operation for collocated networks, the activities of said
collocated networks being coordinated by means of carrier sense
detectors sensing the baseband signals originating from any transmitter
of said collocated networks.
- 25 18. The PPM communication system of any of the preceding claims, wherein
said bandpass components are used during setup of a connection
between said transmitter and said receiver.

1/9

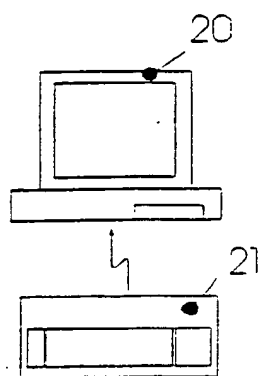


FIG. 1A

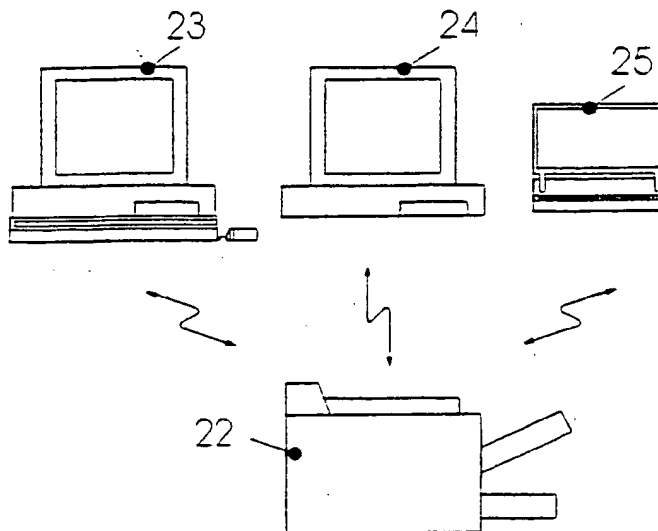


FIG. 1B

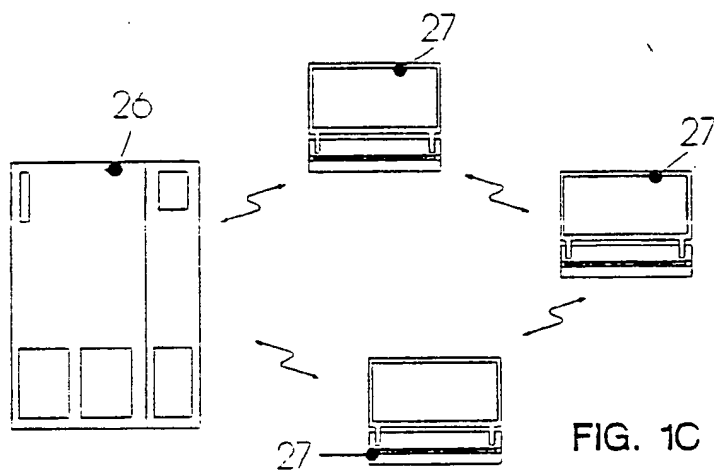


FIG. 1C

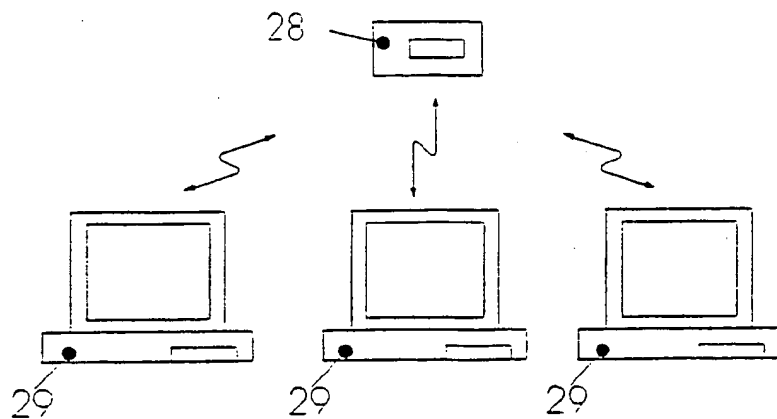


FIG. 1D

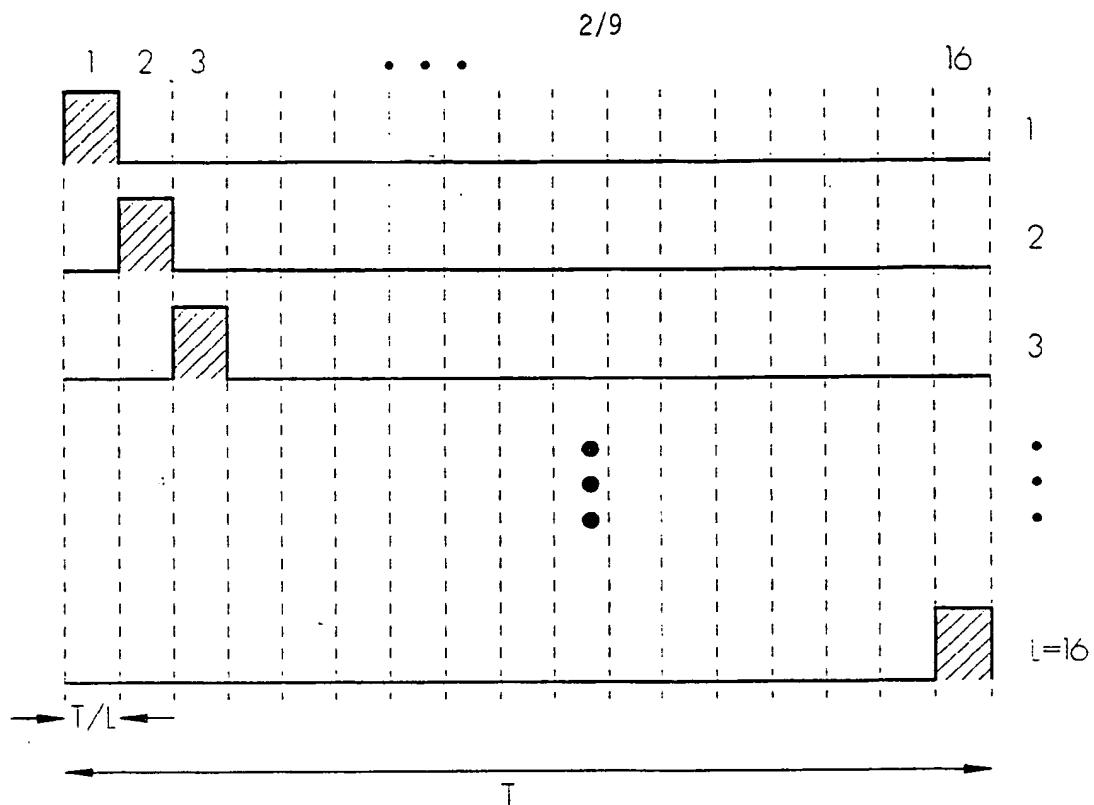


FIG. 2

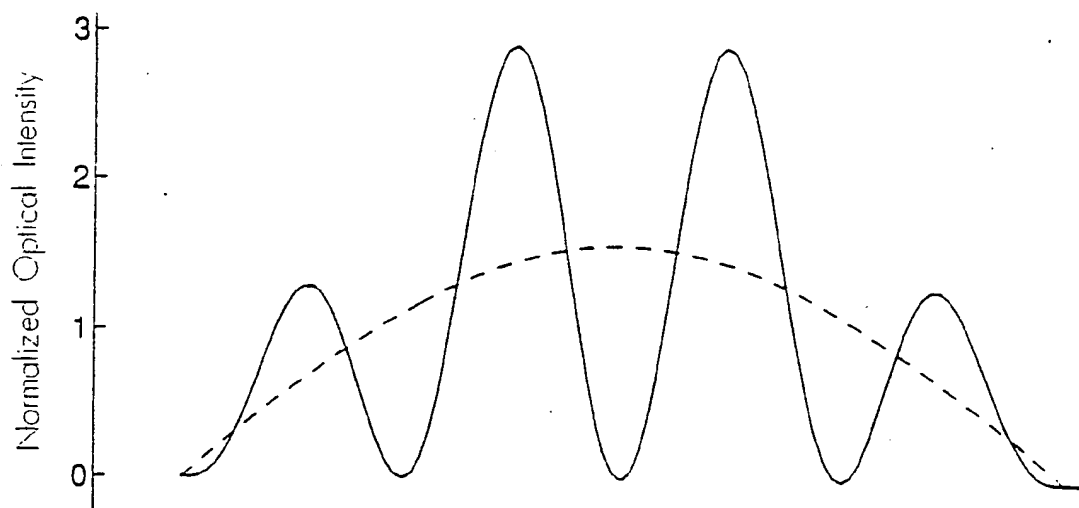


FIG. 4

3/9

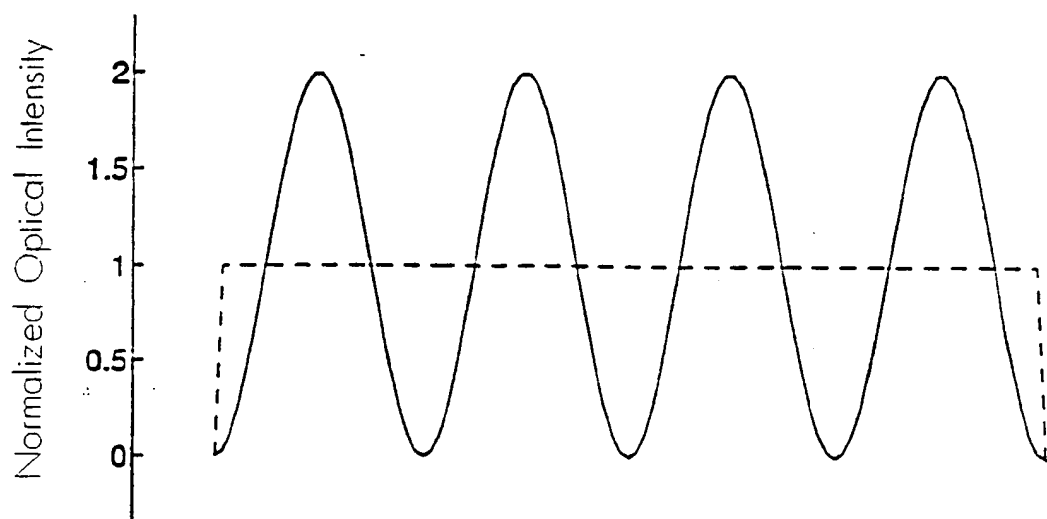


FIG. 3A

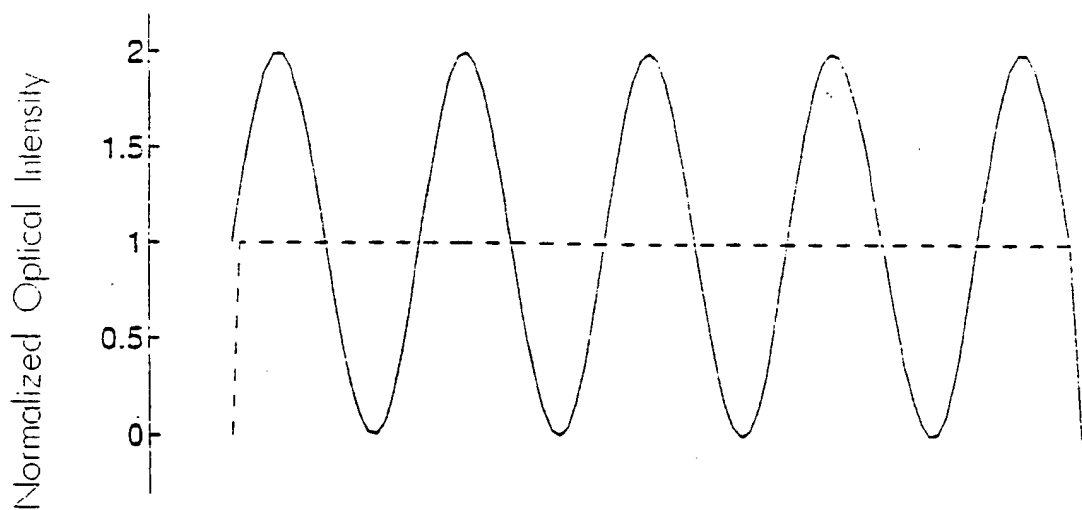


FIG. 3B

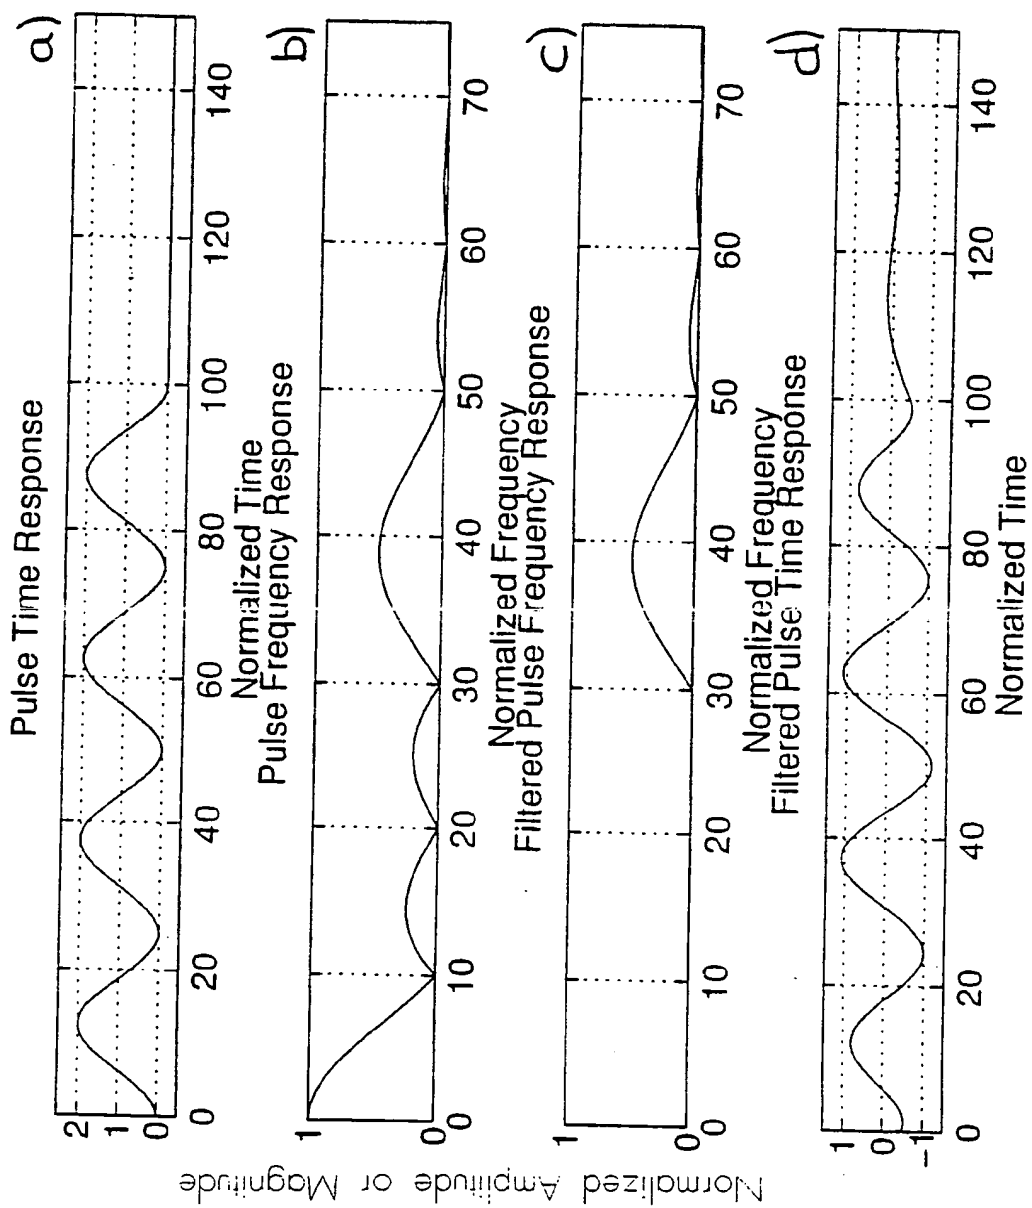


FIG. 5

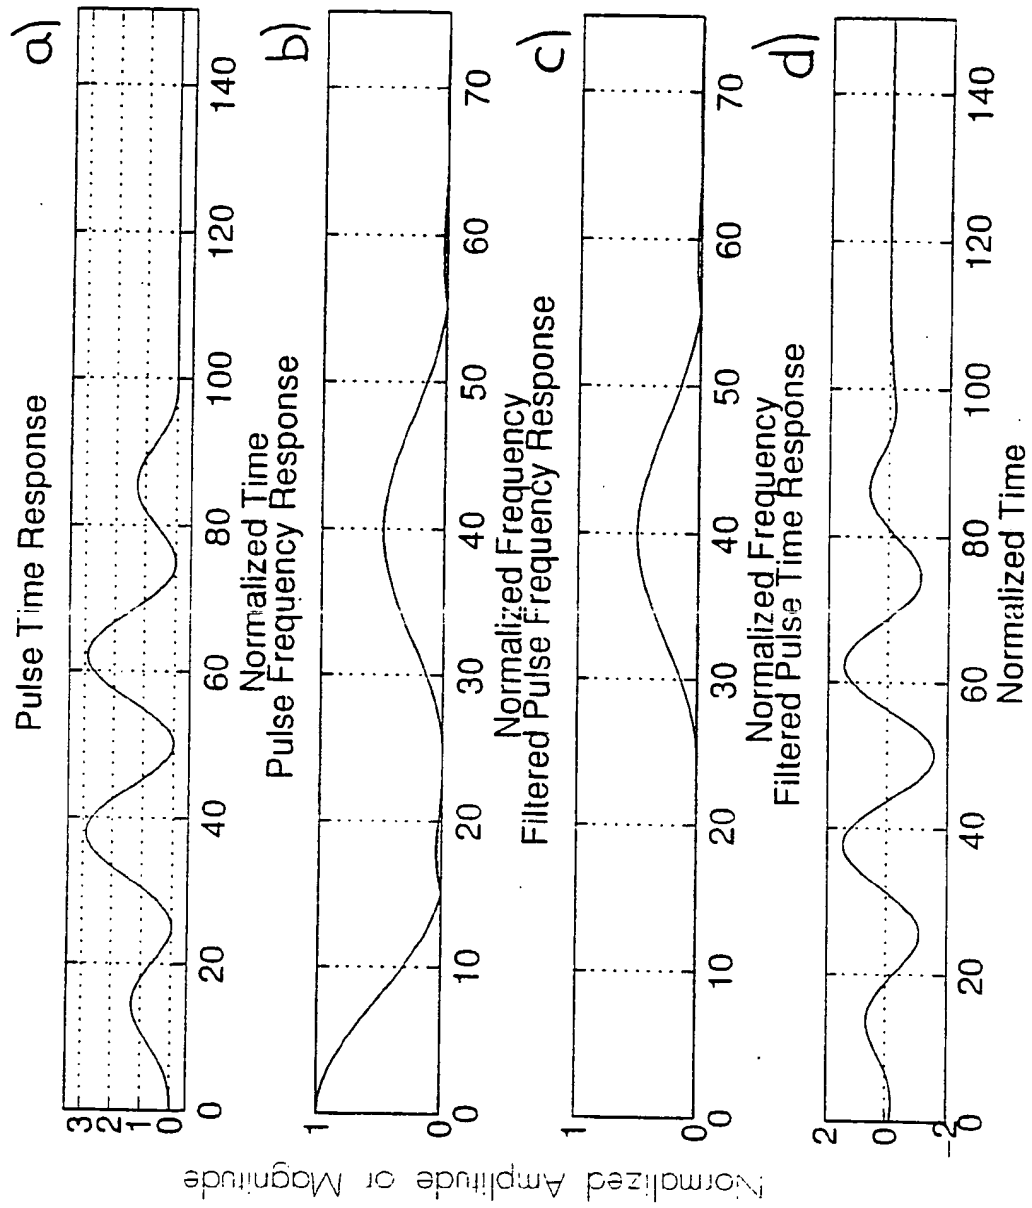


FIG. 6

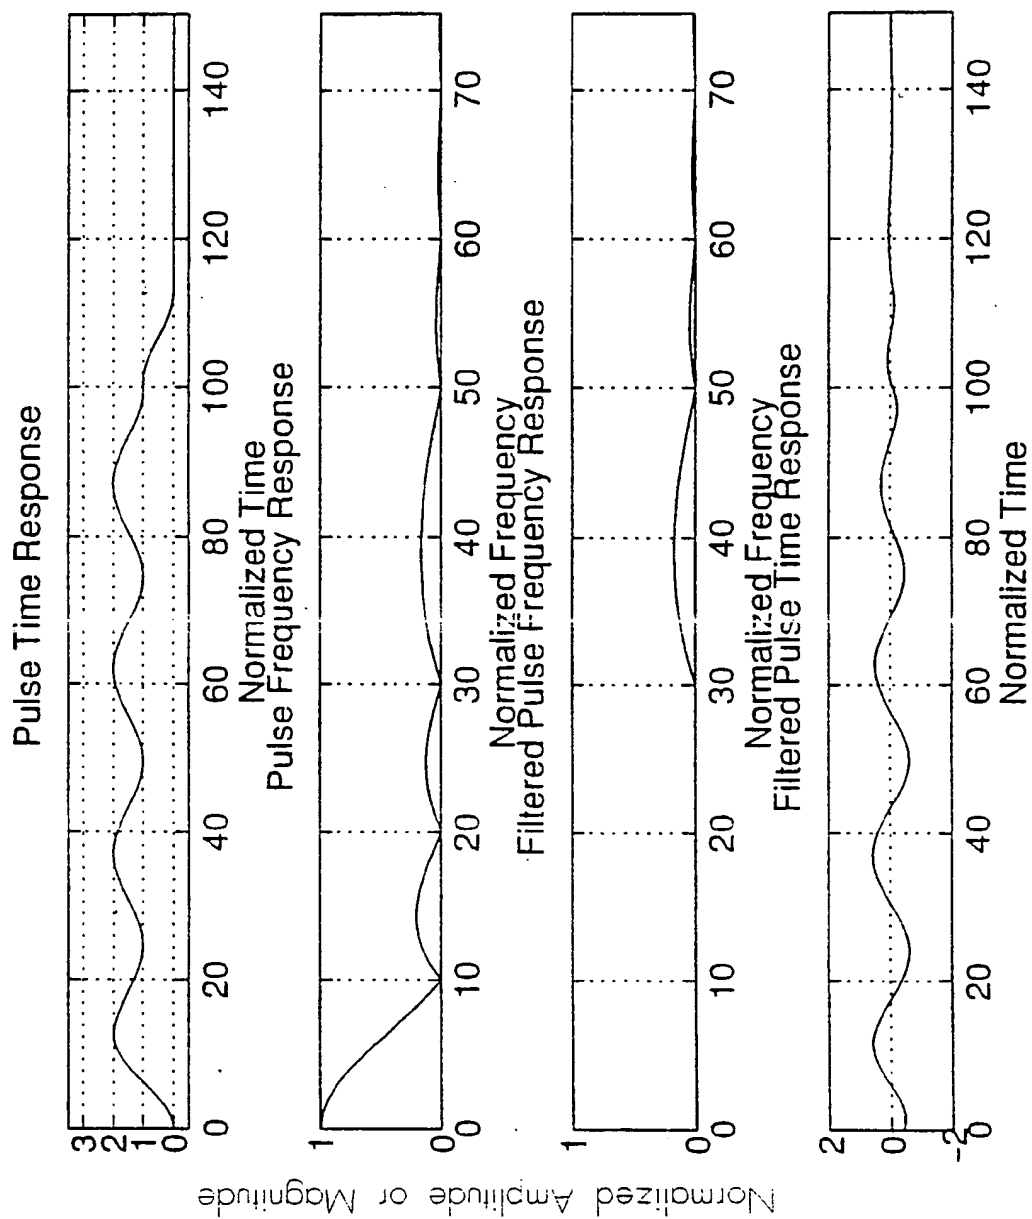


FIG. 7

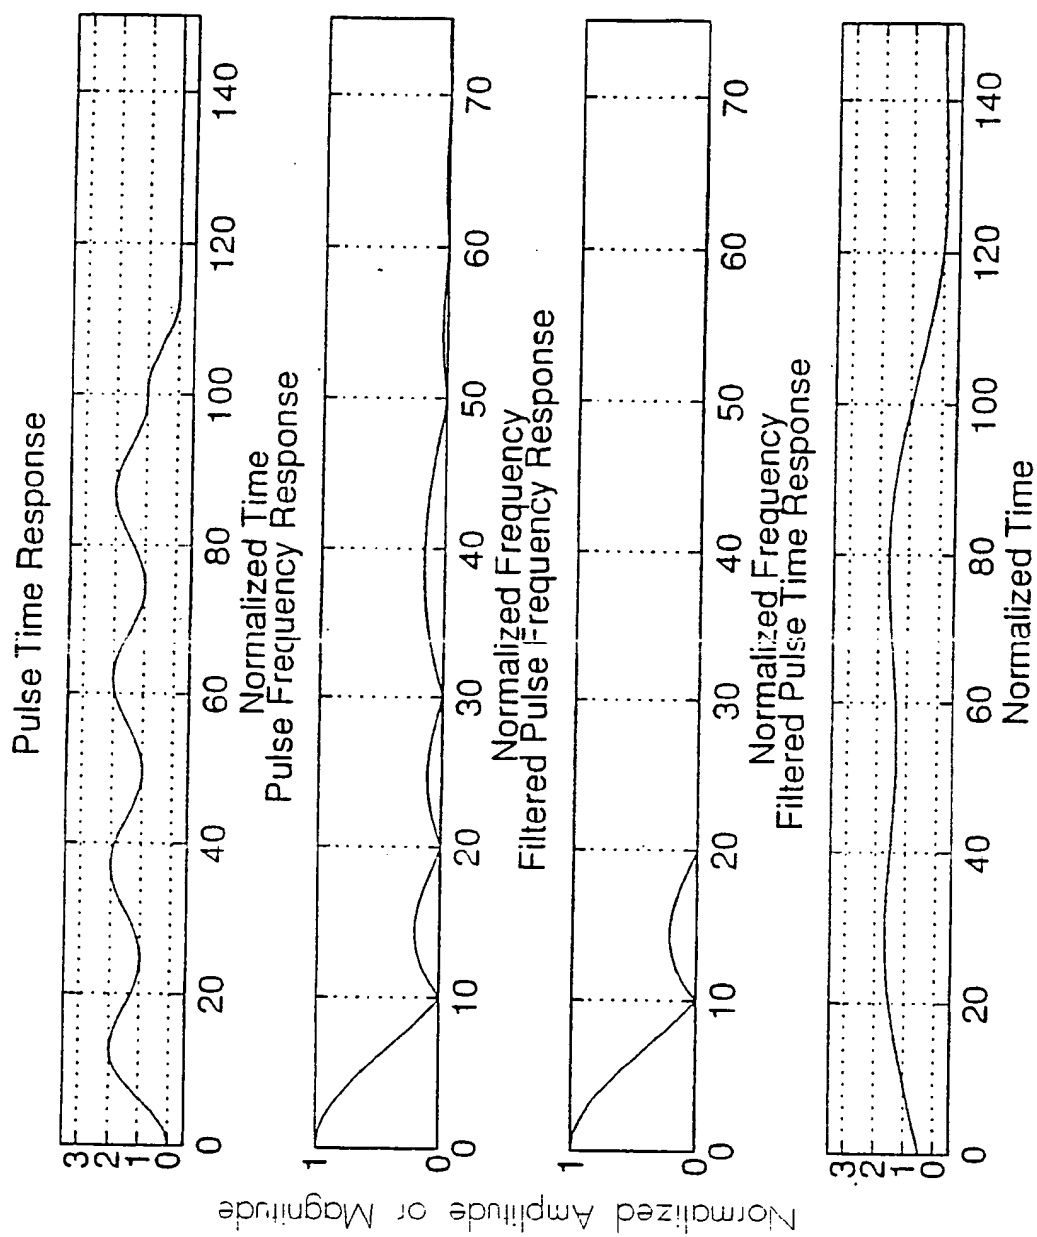


FIG. 8

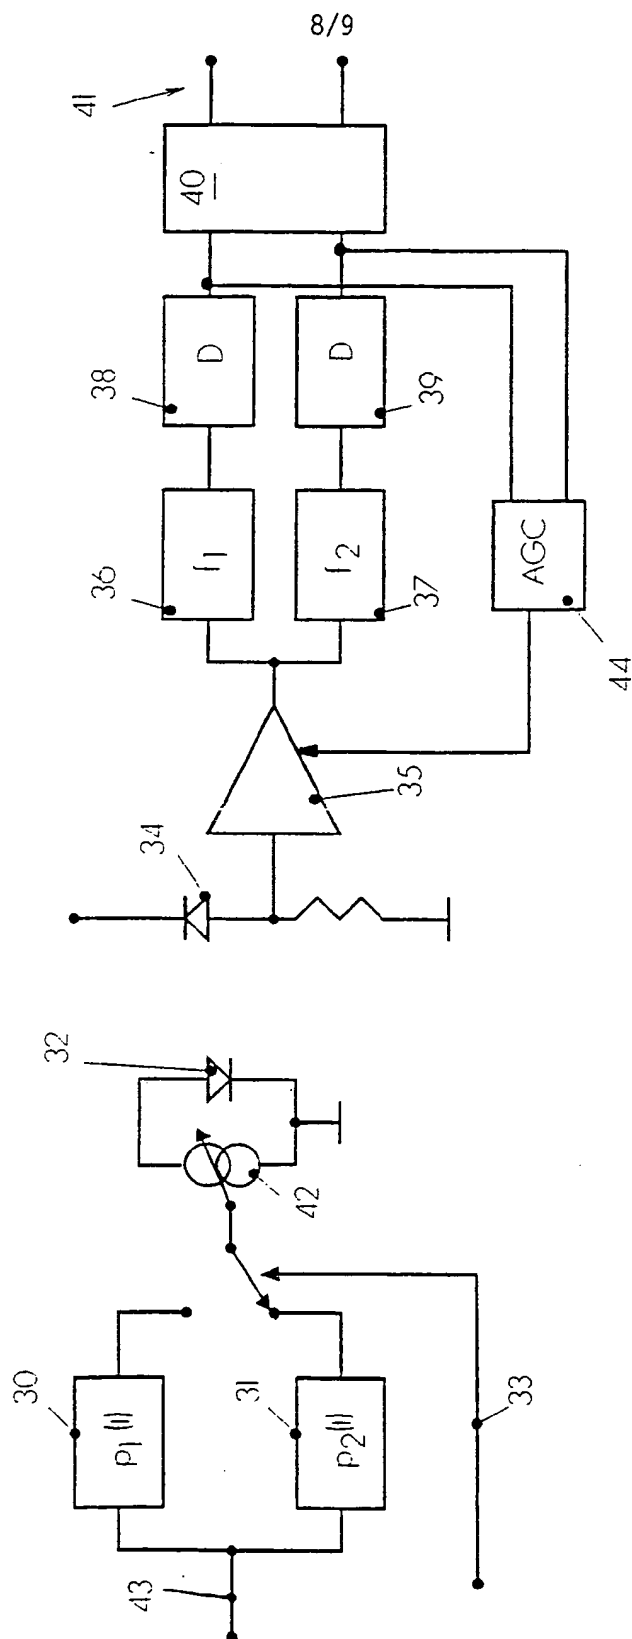


FIG. 9

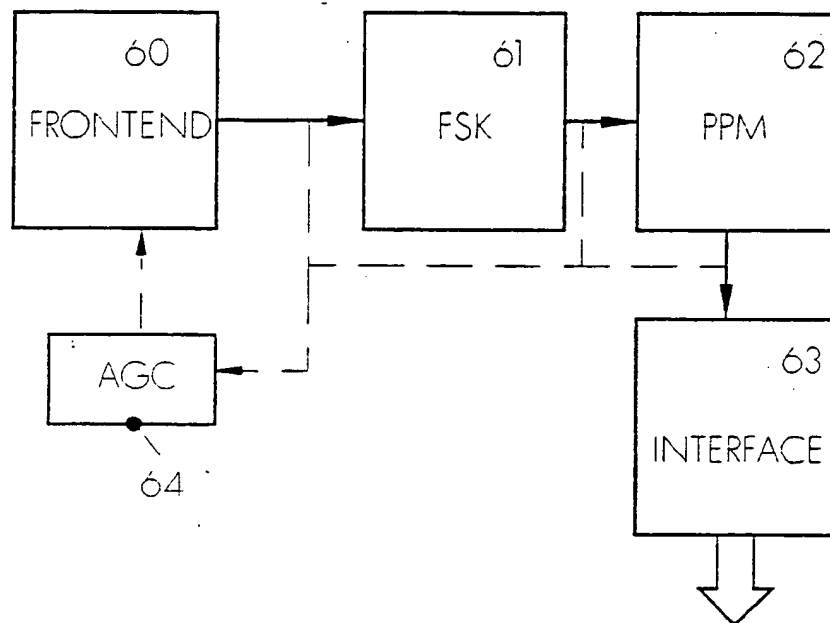


FIG. 10

INTERNATIONAL SEARCH REPORT

International Application No.
PCT/EP 94/00577

A. CLASSIFICATION OF SUBJECT MATTER IPC 6 H04B10/10 H04B14/02 H04L25/49 H04J14/02		
According to International Patent Classification (IPC) or to both national classification and IPC		
B. FIELDS SEARCHED Minimum documentation searched (classification system followed by classification symbols) IPC 6 H04L H04B H04J		
Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched		
Electronic data base consulted during the international search (name of data base and, where practical, search terms used)		
C. DOCUMENTS CONSIDERED TO BE RELEVANT		
Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	PATENT ABSTRACTS OF JAPAN vol. 2, no. 104 (E-053) 1978 & JP,A,53 070 709 (FUJITSU) see abstract ---	1,6,7,9
X	US,A,5 113 278 (DEGURA ET AL) 12 May 1992 see column 3, line 61 - column 4, line 2 see column 4, line 59 - column 5, line 10 see column 7, line 34 - line 38 see column 8, line 3 - line 10 see figures 2,10	6
Y	---	1,7,8,15
Y	PATENT ABSTRACTS OF JAPAN vol. 15, no. 29 (E-1026) 1991 & JP,A,02 272 928 (MITSUI MINING & SMELTING) see abstract ---	1,7,8,15
-/-		
<div style="display: flex; justify-content: space-between;"> <input checked="" type="checkbox"/> Further documents are listed in the continuation of box C. <input checked="" type="checkbox"/> Patent family members are listed in annex. </div>		
* Special categories of cited documents : <div style="display: flex; justify-content: space-between;"> <div style="width: 45%;"> <p>"A" document defining the general state of the art which is not considered to be of particular relevance</p> <p>"B" earlier document but published on or after the international filing date</p> <p>"C" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)</p> <p>"D" document referring to an oral disclosure, use, exhibition or other means</p> <p>"P" document published prior to the international filing date but later than the priority date claimed</p> </div> <div style="width: 45%;"> <p>"I" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention</p> <p>"X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone</p> <p>"Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art.</p> <p>"&" document member of the same patent family</p> </div> </div>		
Date of the actual completion of the international search <div style="text-align: center;">25 October 1994</div>	Date of mailing of the international search report <div style="text-align: center;">31.10.94</div>	
Name and mailing address of the ISA European Patent Office, P.B. 5818 Patentlaan 2 NL - 2280 HV Rijswijk Tel. (+31-70) 340-2040, Tx. 31 651 epo nl, Fax: (+31-70) 340-3016	Authorized officer <div style="text-align: center;">Williams, M.I.</div>	

INTERNATIONAL SEARCH REPORT

Internat Application No
PCT/EP 94/00577

C.(Continuation) DOCUMENTS CONSIDERED TO BE RELEVANT

Category	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
A	PATENT ABSTRACTS OF JAPAN vol. 15, no. 46 (E-1029) 1991 & JP,A,02 279 035 (MITSUI MINING & SMELTING) see abstract ---	1,6-8
A	EP,A,0 477 699 (FUJITSU) 1 April 1992 see column 5, line 36 - line 58 see column 7, line 24 - line 41 see column 7, line 52 - column 8, line 3 see column 8, line 10 - line 19 see column 8, line 33 - line 38 see column 8, line 57 - column 9, line 8 see column 9, line 18 - line 20 see figures 5,10 -----	1-3, 6-11,13, 15,17

INTERNATIONAL SEARCH REPORT

Information on patent family members

International Application No

PCT/EP 94/00577

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
US-A-5113278	12-05-92	JP-A- 2284548	21-11-90
EP-A-0477699	01-04-92	JP-A- 4123542	23-04-92
		JP-A- 4157822	29-05-92
		CA-A- 2051325	15-03-92